

# Request to Exit Button Range



WL-EBLPP04/BK



WL-EBLPP02/BK

WL-EBPP02P/GN



Push Plate DDA Button

## Technical specifications

### REX


- Contacts : Double pole NONC contact.
- Output : 4 AMP contact @ 30 V ACDC.
- Wear resistant legend.
- Security screws (Allen key type)
- Voltage free contacts.

### RECEIVER

- Internal use only/entry level.
- Power input: 12 VDC
- Operates on 433Mhz
- Relay 10A ~ 120VAC  
20A ~ 14VDC
- Jumper in position - Toggled.

WL-EBLPP02/BK	129x129x54 (mm)	Large wireless round stainless steel push plate	516g (Boxed) / 390g (Unboxed)
WL-EBLPP04/BK	129x129x54 (mm)	Large wireless square stainless steel push plate	516g (Boxed) / 390g (Unboxed)
WL-EBPP02P/GN	94x94x28 (mm)	Wireless push plate	204g (Boxed) / 168g (Unboxed)
REC01	70x21x40 (mm)	Remote Receiver	

Other items in the RGL range.

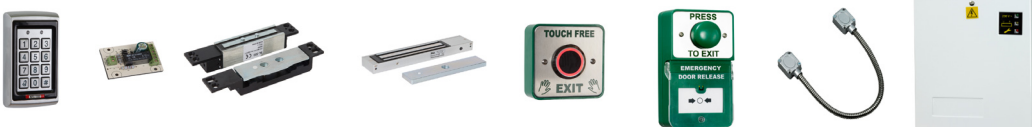

Access Control

## FEATURES - BUTTON

- Momentary switch.
- Can be surface fitted.
- Easy clean surface. Ideal for general/sensitive areas.

## FEATURES - RECEIVER

- Durable plastic
- Relay contacts can be toggled.
- Programmable remote
- Supplied with a 27A battery.

